


Yaesu FTM-100DR wideband modification

Remove top cover and disconnect loudspeaker, carefully peel off the update label



Remove resistor

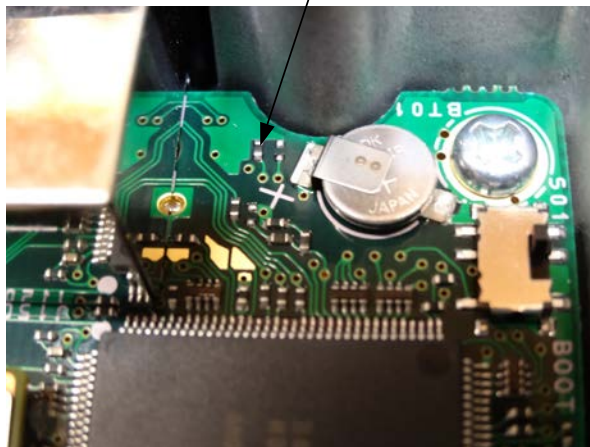

Replace the UPDATE label over the switch and refit the top cover

Reset the radio as follows

All transceiver setting will be restored to the defaults

1. Press and hold DISP/SETUP for over one second, the setup menu appears
2. Rotate the dial to select (13 RST/CLONE) then press DISP/SETUP the menu list appears
3. Rotate the dial to select (1 FACTORY RESET) then press DISP/SETUP
4. Rotate the DIAL to Select (OK) then press DISP/SETUP, to cancel resetting select (Cancel)
5. A beep sound and the call sign input display appears on the screen