


FTM-400DR and FTM-400DE extended TX frequency range

VHF 137-174 MHz

UHF 400-480 MHz

Printed circuit board near the lithium cell.

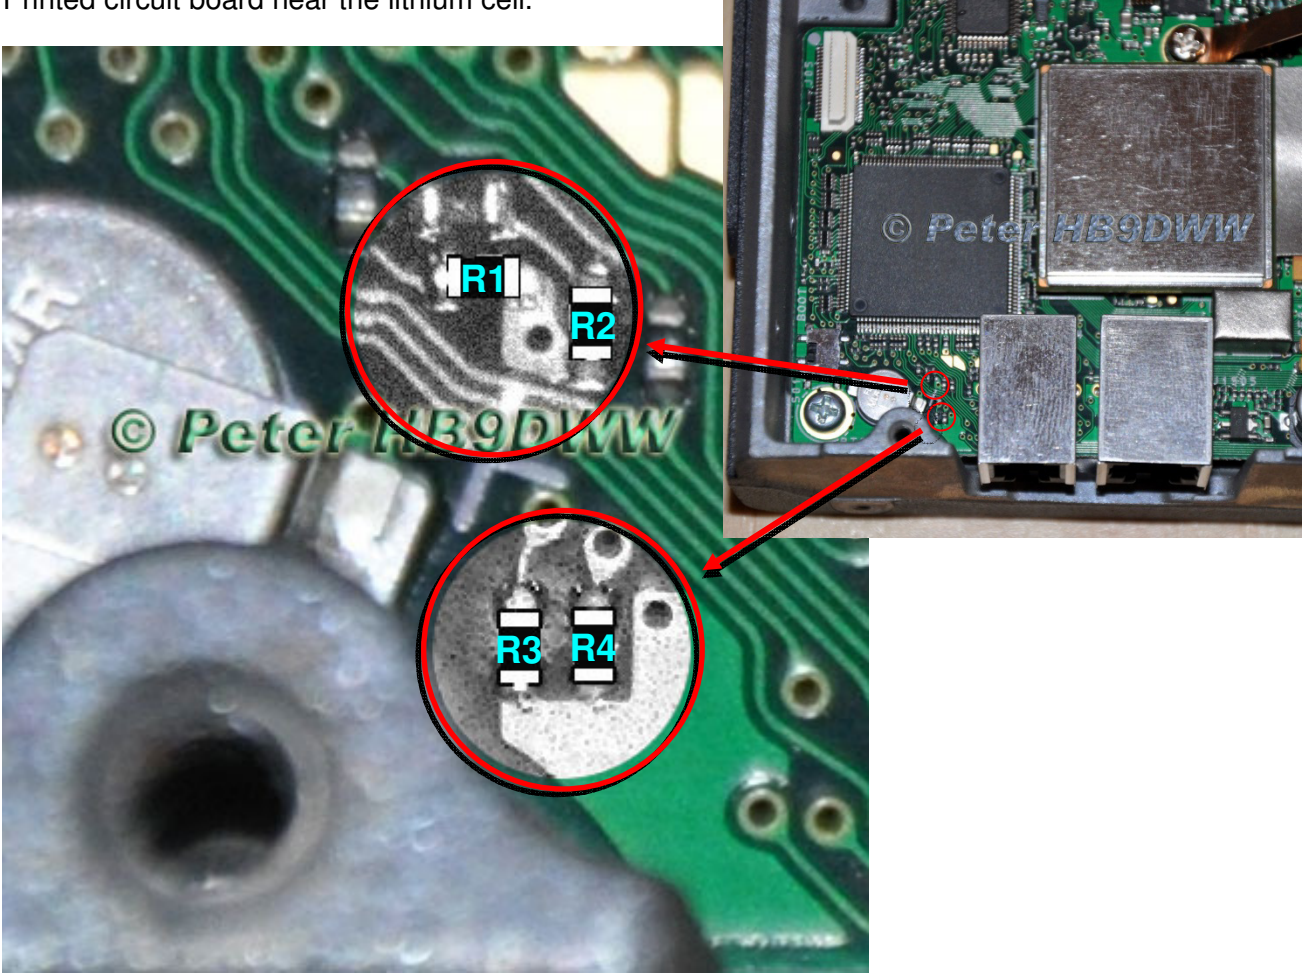

Description	RX wide / Default Shift UHF	(Tx-Range)	R1	R2	R3	R4
FTM-400D	not tested		X	X	X	X
FTM-400D	Rx wide / Shift 5.00	(144-148 / 430-450 MHz)	X	X	X	0
FTM-400D	not tested		X	X	0	X
FTM-400D	Rx wide / Shift 5.00	(137-174 / 400-480 MHz)	X	X	0	0
FTM-400D	not tested		X	0	X	X
FTM-400D	no Rx wide / Shift 1.60	(137-174 / 400-480 MHz)	X	0	X	0
FTM-400D	not tested		X	0	0	X
FTM-400D	Rx wide / Shift 1.60	(144-148 / 430-450 MHz)	X	0	0	0
FTM-400D	no Rx wide	(144-146 / 430-440 MHz)	0	X	X	X
FTM-400D	Rx wide	(137-174 / 420-470 MHz)	0	X	X	0
FTM-400D	Rx wide	(144-146 / 430-440 MHz)	0	X	0	X
FTM-400D	Rx wide	(137-174 / 400-480 MHz)	0	X	0	0
FTM-400D	not tested		0	0	X	X
FTM-400D	Rx wide / Shift 1.60	(137-174 / 400-480 MHz)	0	0	X	0
FTM-400D	not tested		0	0	0	X
FTM-400D	Rx wide / Shift 0.00	(137-174 / 400-480 MHz)	0	0	0	0

R1 to R4 are 0 Ohm resistors
0 = Resistor removed
X = Resistor in place

Please note:

Modify your FTM-400D at your own risk! Missing values are not verified.

2015-04-05 HB9DWW